

PIPELINE REMOTE PHOSPHOR LED SYSTEM™



THE PERFECT SOFT LIGHT

From BB&S Lighting, the company that pioneered remote phosphor technology in LED lighting fixtures, comes a revolutionary next step: the Pipeline System.


In a convenient cylindrical form factor in lengths of 4", 8", 1', 2', 3' and 4', the Pipeline System provides ultra-high TLCI (Television Lighting Consistency Index) soft light that is controllable and dimmable with no color shift or flickering. Whether installed in an optional single or multi-lamp reflector bank, or deployed stand-alone, Pipelines are the perfect soft-light for modeling faces and illuminating backgrounds.

Among Pipeline's numerous advantages are low power draw, high light output, wide light dispersion, heatless and fan-less operation. The Pipes are available in 3200°K, 4300°K or 5600°K color temperature outputs, and can be used in a bi-color arrangement mixing different color temperature Pipes to achieve mid-range color temperatures.

Pipeline Free

Pipeline Free Remote phosphor fixtures feature inline driver/dimmers. Now the line expands with the addition of 4", 8", 3' and 4' joining the 1' and 2'. Draw is 10W per 1', delivering 1000 lumens per 1' at 98 TLCI. Choose 3200K, 4300K, 5600K. Available accessories include: power supply, 10' cable, cases, and mounting hardware. Look for them in singles or kits.

- Ultra High TLCI: 3200°K, 4300°K or 5600°K
- Available in 4", 8", 1', 2', 3' or 4' lengths
- Includes driver/dimmer and 10' of cable
- 3/8" Mounting Adapter with Spigot
- Includes International Power Supply
- Flicker-free dimming from 100%-0
- Extremely high light output
- Wide 180° light dispersion

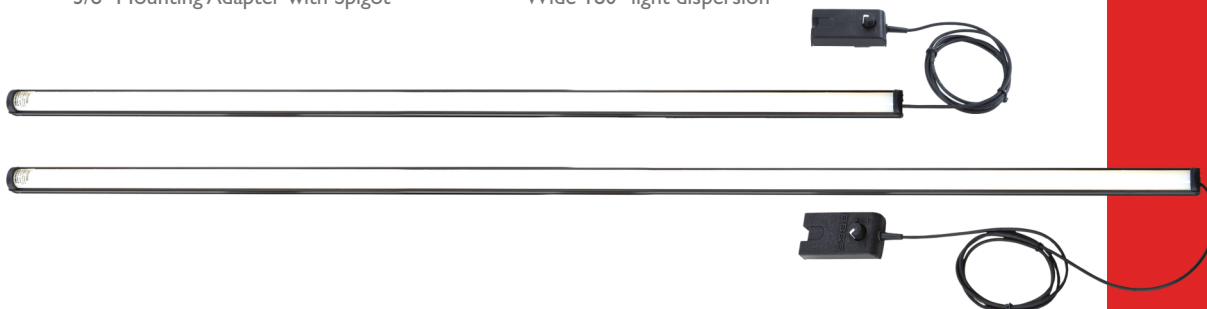

Pipeline Free Fixtures

Pipeline LED System Specifications

POWER

AC Power: 100-240V 50/60Hz
Max Power Draw: 10Watts per foot
Battery Operation: 14V DC

FREE

4"= 350 Lumens on 4W max draw
8"= 700 Lumens on 7W max draw
1'= 1000 Lumens on 10W max draw
2'= 2000 Lumens on 20W max draw
3'= 3000 Lumens on 30W max draw
4'= 4000 Lumens on 40W max draw

LED

Premium LED Array - 50,000 hour life
High Quality 5600°K -TLCI 98+
High Quality 4300°K -TLCI 98+
High Quality 3200°K -TLCI 98+

CONTROL

Manual dimming

DIMENSIONS

Length: 4" / 101mm
Length: 8" / 203mm
Length: 1' / 305mm
Length: 2' / 610mm
Length: 3' / 914mm
Length: 4' / 1219mm
Width: 1" / 25.4mm

THERMAL

Ambient Operating Temperature:
-10° - 40°C / 14° - 104°F

Specifications subject to change without notice.

USA: info@bbslighting.com
1.800.820.6610 | bbslighting.com
Denmark: info@brothers-sons.dk
+45 70 27 42 41 | brothers-sons.dk



BBSLIGHTING.COM
+1 800.820.6610

PIPELINE REMOTE PHOSPHOR LED SYSTEM™



Pipeline Free Fixtures



Ambient light only



Pipeline Reporter at 50%



Pipeline Reporter Kit

USA: info@bbslighting.com
1.800.820.6610 | bbslighting.com
Denmark: info@brothers-sons.dk
+45 70 27 42 41 | brothers-sons.dk



BBSLIGHTING.COM
+1 800.820.6610